



## Product Datasheet



### ■ Features :

- Constant current mode power supply
- Universal AC input / Full range
- Withstand 265VAC Surge input for 60 seconds
- Protections: Short circuit / Over voltage
- Fully isolated plastic case
- Small and compact size
- Cooling by free air convection
- IP20 design 100% full load burn-in test
- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)


## ADI-30500

## 30W Single Output Constant Current


### ELECTRICAL SPECIFICATIONS

MODEL	ADI-30500
OUTPUT	RATED CURRENT
	500mA
	NOMINAL DC VOLTAGE RANGE
	30-60V
	RATED POWER
	30W
	RIPPLE & NOISE (max.) Note.2
	±2.0%
	VOLTAGE TOLERANCE Note.3
	±5.0%
INPUT	CURRENT ACCURACY
	±3.0%
	LINE REGULATION
	±2.0%
	LOAD REGULATION
	±1.0%
	SETUP, RISE TIME
	1000ms, 40ms full load at 230VAC
	HOLD UP TIME (Typ.)
	20ms full load at 230VAC
PROTECTION	VOLTAGE RANGE
	220 ~ 240VAC
	FREQUENCY RANGE
	47 ~ 63Hz
	EFFICIENCY
	88%
	NO-LOAD POWER
	0.02W at 230VAC, typical
	POWER LOSS
	4W full load at 230VAC, input power 34W max.
ENVIRONMENT	NOMINAL CURRENT
	0.047A full load, at 230VAC 50Hz
	POWER FACTOR
	0.94 full load, at 230VAC 50Hz
	TOTAL HARMONIC DISTORTION (THD)
	<12% full load, at 230VAC 50Hz
	INRUSH CURRENT
	<45A (twidth=490 s measured at 50% Ipeak) at 230VAC 50Hz
	MAX. No.Of PSUs on 16A CIRCUIT BREAKER
	17 units (circuit breaker of type B) / 28 units (circuit breaker of type C) at 230VAC 50Hz
SAFETY & EMC (Note 4)	PROTECTION CLASS
	Class II, Suitable for class I luminaires
	LEAKAGE CURRENT
	0.25mA at 230VAC output floating
	OVERLOAD
	Approx 2% output power value
	Protection type : Hiccup mode, recovers automatically after fault condition is removed
	OVER VOLTAGE
	~ 78V
PACKAGE	Protection type : Shut off o/p voltage, clamping by zener diode
	OVER TEMPERATURE
	Hiccup mode, recovers automatically after temperature goes down
	WORKING TEMP.
	-30°C . . 70°C (Refer to "Derating Curve")
	WORKING HUMIDITY
	20 ~ 75% RH non-condensing, in luminaire
	STORAGE TEMP., HUMIDITY
	-40°C . . 80°C, 10 ~ 60% RH
NOTE	TEMP. COEFFICIENT
	±0.03%/°C (0 ~ 50°C)
	RATING
	Indoor
	IP RATING
	IP20
	MAINS SWITCHING CYCLES
	> 100.000
	EXPECTED LIFETIME
	35.000hrs tc Max =75°C, 10% failure rate, 50.000hrs tc Max =45°C, 10% failure rate
SAFETY & EMC (Note 4)	VIBRATION
	IEC60068-2-6 TEST Fc (Sinusoidal), IEC60068-2-27 Test Ea and guidance: Shock, IEC60068-2-29 Basic Test Part2: Bump 10 ~ 500Hz, 2G 10min./cycle, period for 60min. Each along X, Y, Z axes
	SAFETY STANDARDS
	EN61347-1, Lamp controlgear - Part1: General and safety requirements
	SAFETY STANDARDS
	EN61347-2-13, Lamp controlgear - Part2-13: Particular requirements for dc or ac supplied electronic control gear for Led modules
	WITHSTAND VOLTAGE
	I/P-O/P: 3KVAC 5mA 60 second
	PERFORMANCE REQUIREMENTS
	EN62384, DC or AC supplied electronic control gear for LED modules
PACKAGE	ISOLATION RESISTANCE
	I/P - O/P > 6M Ohms / 500VDC / 25°C / 70% RH
	EMC EMISSION
	EN55015, EN55032 (CISPR32) Class B, EN61000-3-2 Class A, EN61000-3-3
	EMC IMMUNITY
	EN61547, EN61000-4-2,3,4,5,6,8,11, EN55024
	DIMENSION
	Length 133/96mm, With 43mm, Height 29mm
	MOUNTING HOLE SPACING
	Length 130mm, With 40mm
NOTE	WEIGHT&PACKING
	80gr. 70pcs/13.0Kgs/0.71CUFT
	CASING MATERIAL
	Plastic
	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
	2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
	3. Tolerance : includes set up tolerance, line regulation and load regulation.
	4. The power supply is considered as a component that will be operated in combination with final equipment, Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.


**Diagrams**

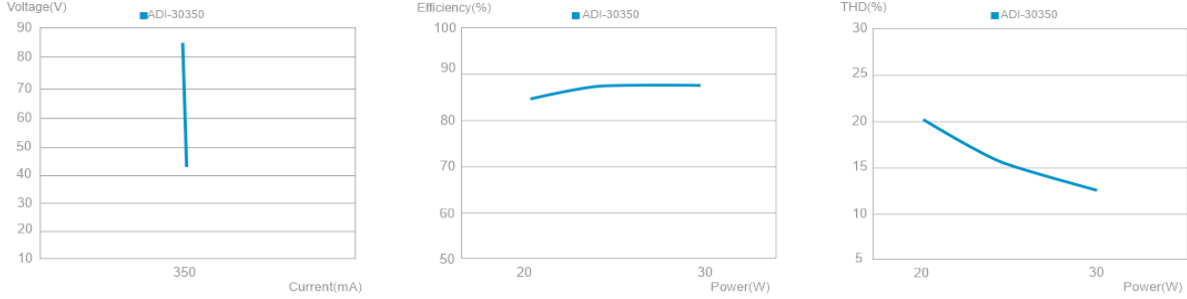

**Mecanical Specification**

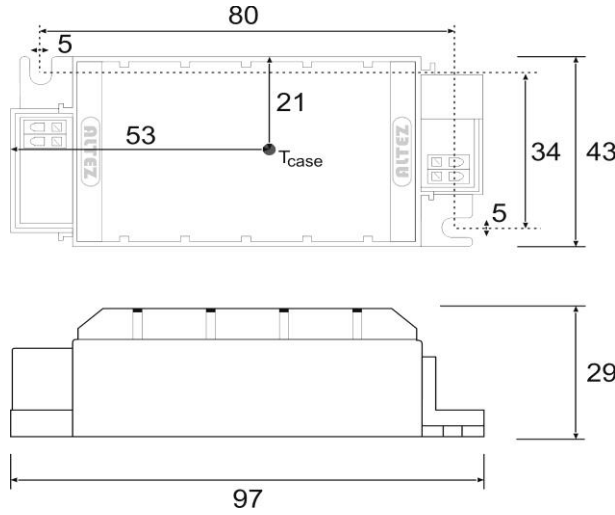

**Wiring Diagram**

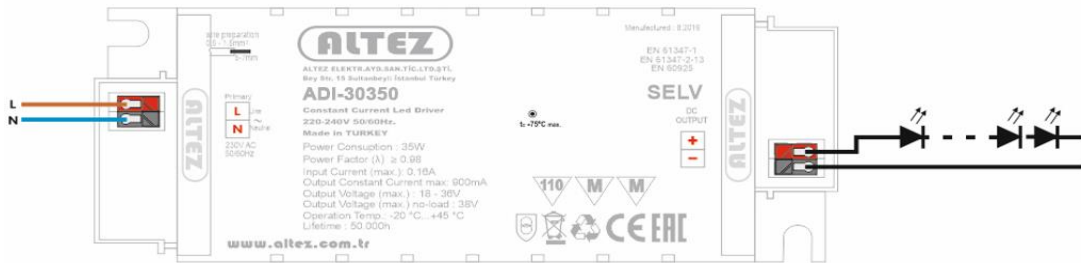



## Product Datasheet



- **Features :**
- Constant current mode power supply
- Universal AC input / Full range
- Withstand 265VAC Surge input for 60 seconds
- Protections: Short circuit / Over voltage
- Fully isolated plastic case
- Small and compact size
- Cooling by free air convection
- IP20 design 100% full load burn-in test
- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)


### ADI-30700

### 30W Single Output Constant Current


#### ELECTRICAL SPECIFICATIONS

MODEL	ADI-30700	
OUTPUT	RATED CURRENT	700mA
	NOMINAL DC VOLTAGE RANGE	21-42V
	RATED POWER	30W
	RIPPLE & NOISE (max.) Note.2	±2.0%
	VOLTAGE TOLERANCE Note.3	±5.0%
	CURRENT ACCURACY	±3.0%
	LINE REGULATION	±2.0%
	LOAD REGULATION	±1.0%
	SETUP, RISE TIME	1000ms, 40ms full load at 230VAC
	HOLD UP TIME (Typ.)	20ms full load at 230VAC
INPUT	VOLTAGE RANGE	220 ~ 240VAC
	FREQUENCY RANGE	47 ~ 63Hz
	EFFICIENCY	88%
	NO-LOAD POWER	0.02W at 230VAC, typical
	POWER LOSS	4W full load at 230VAC, input power 34W max.
	NOMINAL CURRENT	0.047A full load, at 230VAC 50Hz
	POWER FACTOR	0.94 full load, at 230VAC 50Hz
	TOTAL HARMONIC DISTORTION (THD)	<12% full load, at 230VAC 50Hz
	INRUSH CURRENT	<45A (twidh=490 s measured at 50% Ipeak) at 230VAC 50Hz
	MAX. No. Of PSUs on 16A CIRCUIT BREAKER	17 units (circuit breaker of type B) / 28 units (circuit breaker of type C) at 230VAC 50Hz
	PROTECTION CLASS	Class II, Suitable for class I luminaires
	LEAKAGE CURRENT	0.25mA at 230VAC output floating
PROTECTION	OVERLOAD	Approx 2% output power value Protection type : Hiccup mode, recovers automatically after fault condition is removed
	OVER VOLTAGE	~ 55V Protection type : Shut off o/p voltage, clamping by zener diode
	OVER TEMPERATURE	Hiccup mode, recovers automatically after temperature goes down
	WORKING TEMP.	-30°C .. 70°C (Refer to "Derating Curve")
ENVIRONMENT	WORKING HUMIDITY	20 ~ 75% RH non-condensing, in luminaire
	STORAGE TEMP., HUMIDITY	-40°C .. 80°C, 10 ~ 60% RH
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)
	RATING	Indoor
	IP RATING	IP20
	MAINS SWITCHING CYCLES	> 100.000
	EXPECTED LIFETIME	35.000hrs tc Max =75°C, 10% failure rate, 50.000hrs tc Max =45°C, 10% failure rate IEC60068-2-6 TEST Fc (Sinusoidal), IEC60068-2-27 Test Ea and guidance: Shock, IEC60068-2-29 Basic Test Part2: Bump 10 ~ 500Hz, 2G 10min./cycle, period for 60min. Each along X, Y, Z axes
	VIBRATION	
SAFETY & EMC (Note 4)	SAFETY STANDARDS	EN61347-1, Lamp controlgear - Part1: General and safety requirements
	SAFETY STANDARDS	EN61347-2-13, Lamp controlgear - Part2-13: Particular requirements for dc or ac supplied electronic control gear for Led modules
	WITHSTAND VOLTAGE	I/P - O/P: 3KVAC 5mA 60 second
	PERFORMANCE REQUIREMENTS	EN62384, DC or AC supplied electronic control gear for LED modules
	ISOLATION RESISTANCE	I/P - O/P > 6M Ohms / 500VDC / 25°C / 70% RH
	EMC EMISSION	EN55015, EN55032 (CISPR32) Class B, EN61000-3-2 Class A, EN61000-3-3
PACKAGE	EMC IMMUNITY	EN61547, EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024
	DIMENSION	Length 133/96mm, With 43mm, Height 29mm
	MOUNTING HOLE SPACING	Length 130mm, With 40mm
	WEIGHT&PACKING	80gr. 70pcs/13.0Kgs/0.71CUFT
CASING MATERIAL		Plastic
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The power supply is considered as a component that will be operated in combination with final equipment, Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p>	


**Diagrams**

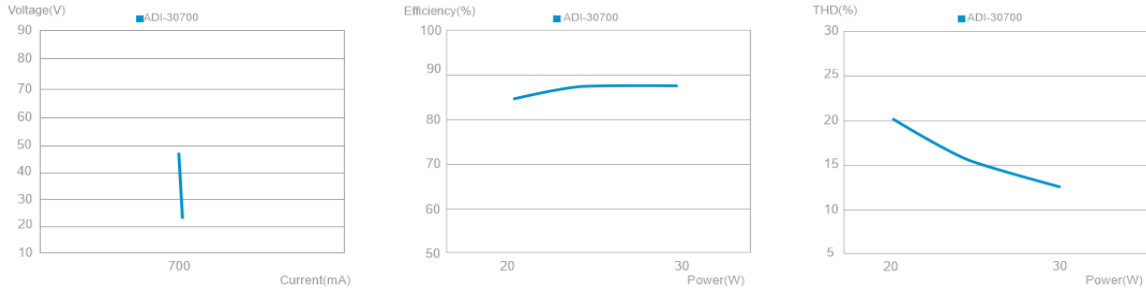


**Mecanical Specification**

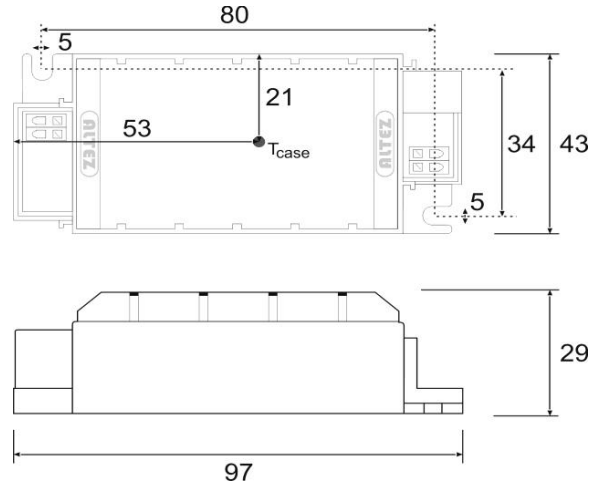

**Wiring Diagram**

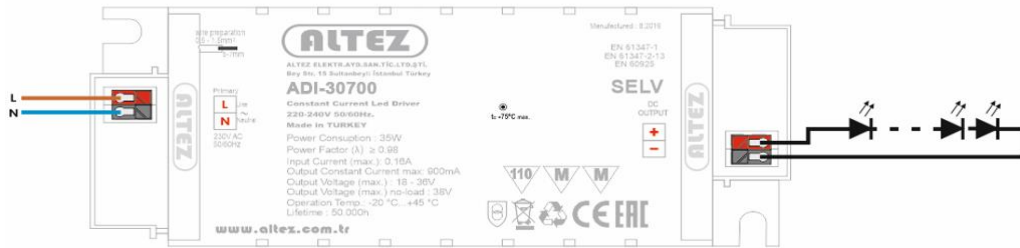

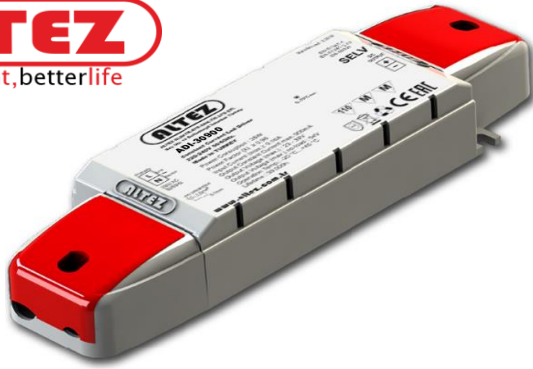

## Product Datasheet

### ■ Features :

- Constant current mode power supply
- Universal AC input / Full range
- Withstand 265VAC Surge input for 60 seconds
- Protections: Short circuit / Over voltage
- Fully isolated plastic case
- Small and compact size
- Cooling by free air convection
- IP20 design 100% full load burn-in test
- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)




## ADI-30900

### 30W Single Output Constant Current


#### ELECTRICAL SPECIFICATIONS

MODEL	ADI-30900	
OUTPUT	RATED CURRENT	900mA
	NOMINAL DC VOLTAGE RANGE	16-33V
	RATED POWER	30W
	RIPPLE & NOISE (max.) Note.2	±2.0%
	VOLTAGE TOLERANCE Note.3	±5.0%
	CURRENT ACCURACY	±3.0%
	LINE REGULATION	±2.0%
	LOAD REGULATION	±1.0%
	SETUP, RISE TIME	1000ms, 40ms full load at 230VAC
	HOLD UP TIME (Typ.)	20ms full load at 230VAC
INPUT	VOLTAGE RANGE	220 ~ 240VAC
	FREQUENCY RANGE	47 ~ 63Hz
	EFFICIENCY	88%
	NO-LOAD POWER	0.02W at 230VAC, typical
	POWER LOSS	4W full load at 230VAC, input power 34W max.
	NOMINAL CURRENT	0.047A full load, at 230VAC 50Hz
	POWER FACTOR	0.94 full load, at 230VAC 50Hz
	TOTAL HARMONIC DISTORTION (THD)	<12% full load, at 230VAC 50Hz
	INRUSH CURRENT	<45A (twidh=490 s measured at 50% Ipeak) at 230VAC 50Hz
	MAX. No.Of PSUs on 16A CIRCUIT BREAKER	17 units (circuit breaker of type B) / 28 units (circuit breaker of type C) at 230VAC 50Hz
PROTECTION	PROTECTION CLASS	Class II, Suitable for class I luminaires
	LEAKAGE CURRENT	0.25mA at 230VAC output floating Approx 2% output power value
	OVERLOAD	Protection type : Hiccup mode, recovers automatically after fault condition is removed
	OVER VOLTAGE	~ 44V Protection type : Shut off o/p voltage, clamping by zener diode
ENVIRONMENT	OVER TEMPERATURE	Hiccup mode, recovers automatically after temperature goes down
	WORKING TEMP.	-30°C .. 70°C (Refer to "Derating Curve")
	WORKING HUMIDITY	20 ~ 75% RH non-condensing, in luminaire
	STORAGE TEMP., HUMIDITY	-40°C .. 80°C, 10 ~ 60% RH
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)
	RATING	Indoor
	IP RATING	IP20
	MAINS SWITCHING CYCLES	> 100.000
	EXPECTED LIFETIME	35.000hrs tc Max =75°C, 10% failure rate, 50.000hrs tc Max =45°C, 10% failure rate
	VIBRATION	IEC60068-2-6 TEST Fc (Sinusoidal), IEC60068-2-27 Test Ea and guidance: Shock, IEC60068-2-29 Basic Test Part2: Bump 10 ~ 500Hz, 2G 10min./cycle, period for 60min. Each along X, Y, Z axes
SAFETY & EMC (Note 4)	SAFETY STANDARDS	EN61347-1, Lamp controlgear - Part1:General and safety requirements
	SAFETY STANDARDS	EN61347-2-13, Lamp controlgear - Part2-13: Particular requirements for dc or ac supplied electronic control gear for Led modules
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC 5mA 60 second
	PERFORMANCE REQUIREMENTS	EN62384, DC or AC supplied electronic control gear for LED modules
	ISOLATION RESISTANCE	I/P - O/P > 6M Ohms / 500VDC / 25°C / 70% RH
	EMC EMISSION	EN55015, EN55032 (CISPR32) Class B, EN61000-3-2 Class A, EN61000-3-3
PACKAGE	EMC IMMUNITY	EN61547, EN61000-4-2,3,4,5,6,8,11, EN55024
	DIMENSION	Length 155/118mm, With 43mm, Height 29mm
	MOUNTING HOLE SPACING	Length 130mm, With40mm
	WEIGHT&PACKING	80gr. 70pcs/13.0Kgs/0.71CUFT
	CASING MATERIAL	Plastic
NOTE	<p>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</p> <p>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF &amp; 47uF parallel capacitor.</p> <p>3. Tolerance : includes set up tolerance, line regulation and load regulation.</p> <p>4. The power supply is considered as a component that will be operated in combination with final equipment, Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.</p>	


**Diagrams**

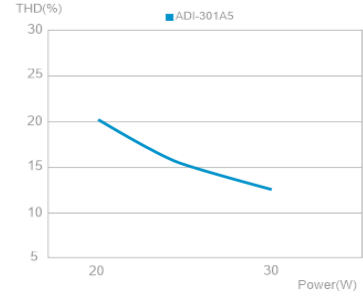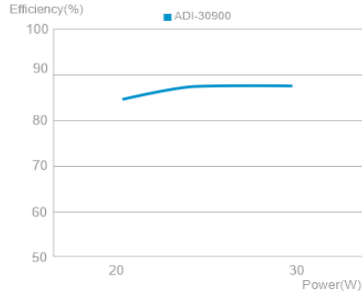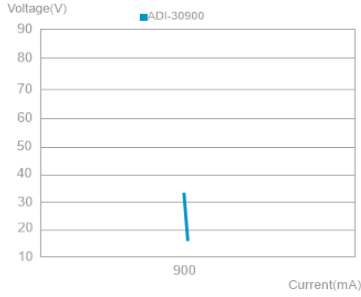

**Mecanical Specification**

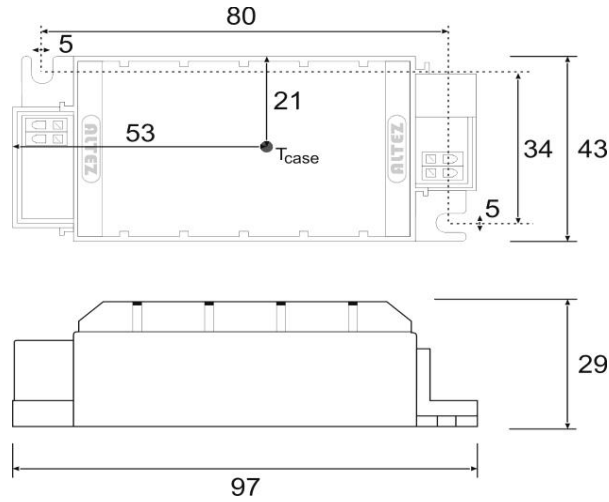

**Wiring Diagram**

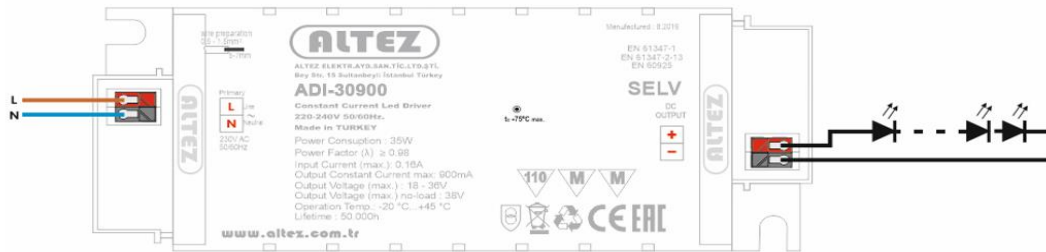



## Product Datasheet

### ■ Features :

- Constant current mode power supply
- Universal AC input / Full range
- Withstand 265VAC Surge input for 60 seconds
- Protections: Short circuit / Over voltage
- Fully isolated plastic case
- Small and compact size
- Cooling by free air convection
- IP20 design 100% full load burn-in test
- Suitable for LED related fixture or appliance (such as LED Decoration or Advertisement devices)


## ADI-301A5

### 30W Single Output Constant Current


#### ELECTRICAL SPECIFICATIONS

MODEL	ADI-301A5
OUTPUT	RATED CURRENT
	1050mA
	NOMINAL DC VOLTAGE RANGE
	14-28V
	RATED POWER
	30W
	RIPPLE & NOISE (max.) Note.2
	±2.0%
	VOLTAGE TOLERANCE Note.3
	±5.0%
INPUT	CURRENT ACCURACY
	±3.0%
	LINE REGULATION
	±2.0%
	LOAD REGULATION
	±1.0%
	SETUP, RISE TIME
	1000ms, 40ms full load at 230VAC
	HOLD UP TIME (Typ.)
	20ms full load at 230VAC
PROTECTION	VOLTAGE RANGE
	220 ~ 240VAC
	FREQUENCY RANGE
	47 ~ 63Hz
	EFFICIENCY
	88%
	NO-LOAD POWER
	0.02W at 230VAC, typical
	POWER LOSS
	4W full load at 230VAC, input power 34W max.
ENVIRONMENT	NOMINAL CURRENT
	0.047A full load, at 230VAC 50Hz
	POWER FACTOR
	0.94 full load, at 230VAC 50Hz
	TOTAL HARMONIC DISTORTION (THD)
	<12% full load, at 230VAC 50Hz
	INRUSH CURRENT
	<45A (twidh=490 s measured at 50% Ipeak) at 230VAC 50Hz
	MAX. No.Of PSUs on 16A CIRCUIT BREAKER
	17 units (circuit breaker of type B) / 28 units (circuit breaker of type C) at 230VAC 50Hz
SAFETY & EMC (Note 4)	PROTECTION CLASS
	Class II, Suitable for class I luminaires
	LEAKAGE CURRENT
	0.25mA at 230VAC output floating
	OVERLOAD
	Approx 2% output power value
	OVER VOLTAGE
	~ 37V
	OVER TEMPERATURE
	Hiccup mode, recovers automatically after temperature goes down
PACKAGE	WORKING TEMP.
	-30°C .. 70°C (Refer to "Derating Curve")
	WORKING HUMIDITY
	20 ~ 75% RH non-condensing, in luminaire
	STORAGE TEMP., HUMIDITY
	-40°C .. 80°C, 10 ~ 60% RH
	TEMP. COEFFICIENT
	±0.03%/°C (0 ~ 50°C)
	RATING
	Indoor
NOTE	IP RATING
	IP20
	MAINS SWITCHING CYCLES
	> 100.000
	EXPECTED LIFETIME
	35.000hrs tc Max =75°C, 10% failure rate, 50.000hrs tc Max =45°C, 10% failure rate
	VIBRATION
	IEC60068-2-6 TEST Fc (Sinusoidal), IEC60068-2-27 Test Ea and guidance: Shock, 10 ~ 500Hz, 2G 10min./cycle, period for 60min. Each along X, Y, Z axes
	SAFETY STANDARDS
	EN61347-1, Lamp controlgear - Part1:General and safety requirements
	SAFETY STANDARDS
	EN61347-2-13, Lamp controlgear - Part2-13: Particular requirements for dc or ac supplied electronic control gear for Led modules
	WITHSTAND VOLTAGE
	I/P-O/P:3KVAC 5mA 60 second
	PERFORMANCE REQUIREMENTS
	EN62384, DC or AC supplied electronic control gear for LED modules
	ISOLATION RESISTANCE
	I/P - O/P > 6M Ohms / 500VDC / 25°C / 70% RH
	EMC EMISSION
	EN55015, EN55032 (CISPR32) Class B, EN61000-3-2 Class A, EN61000-3-3
	EMC IMMUNITY
	EN61547, EN61000-4-2,3,4,5,6,8,11, EN55024
PACKAGE	DIMENSION
	Length 155/118mm, With 43mm, Height 29mm
	MOUNTING HOLE SPACING
	Length 130mm, With40mm
PACKAGE	WEIGHT&PACKING
	80gr. 70pcs/13.0Kgs/0.71CUFT
PACKAGE	CASING MATERIAL
	Plastic
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
	2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
	3. Tolerance : includes set up tolerance, line regulation and load regulation.
	4. The power supply is considered as a component that will be operated in combination with final equipment, Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

**Diagrams**

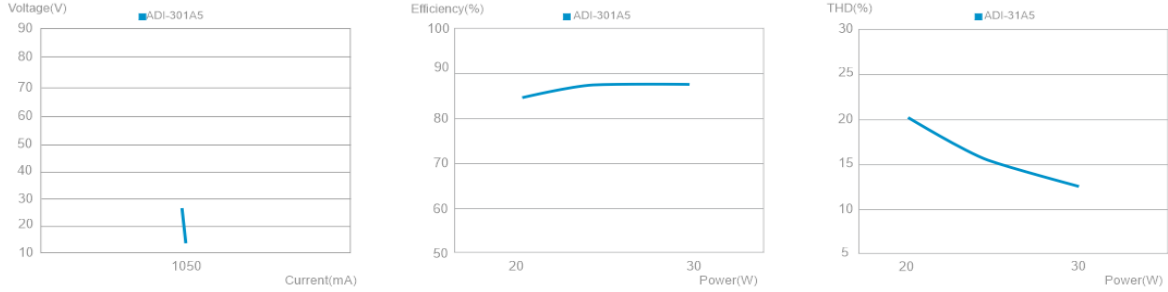

**Mecanical Specification**

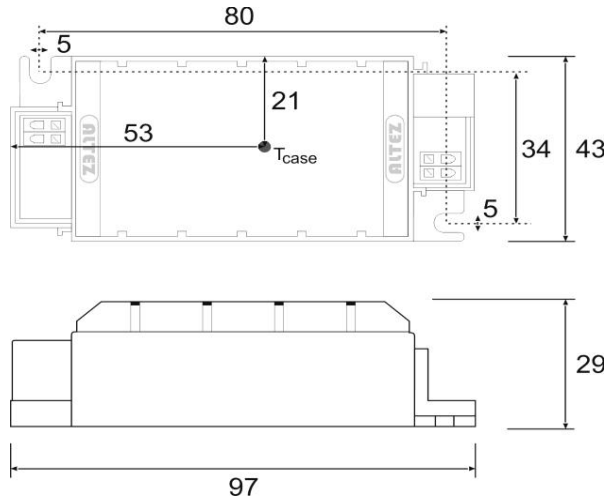

**Wiring Diagram**

