



KIEV

Tek/Çift yüzlü, Sıvaüstü montaj
Surface mounted, single/double sided

Görülebilirlik mesafesi
Visibility range
40m

Özellikler

- *Saç konstrüksiyon üzeri opal plexiglas
- *Sürekli veya acilde çalışma şekli
- *Sıvaüstü tavana montaj
- *T5 8W Floresan ampul veya 18 ledli sistem
- *Acil durumda 3 saat yanabilme
- *Tüm aksesuarları ile kolay montaj
- *Standart şekillerde serigrafi baskılı etiket
- *Ral9016 beyaz elektrostatik toz boyalı gövde

Features

- *Acrylic opal diffuser covered sheet steel casing
- *Maintained, or non-maintained operation mode
- *Surface mounted ceiling
- *Fluorescent lamp T5 8W or 18 LED system
- *Emergency operation 3 hours
- *Easy installation with all accessory
- *Standard pressed or sticker with pictogram shape
- *Electrostatic stove enamelling painted sheet steel body(Ral9016)

Teknik Bilgiler

Technical Data

Çalışma gerilimi	Working voltage	: 220 - 230 V AC 50/60Hz ±%10
Şebekeden çekilen güç	Mains supply power	: Flo.8W, Led 2W (M2 type)/ 5W (M5 type)/ 3W (L3 type)
Şarj süresi	Charge duration	: 24 h (first use:48h)
Acilde ışık çıkış gücü	Emg.Light output power	:1W (M2 type)/ 3W (M5 type) / 3W (L3 type)
Çalışma sıcaklığı	Amp.temp.	: -5°C . . 45°C
Gövde sıcaklığı	Case temp.	: 75°C
Koruma Sınıfı	Protection grade	: IP40
Elektrik Sınıfı	Electrical classification	: I

Standartlar

Standards

EN 60598-1, EN 60598-2-22, EN 62034, EN 61347-1
EMC-2004/108/EC, LVD-2006/95/EC
CE, EAC, TSE

Opsiyonel

Optional

Dali otomasyon sistemi	Automation system for DALI
Merkezi Batarya sistemi	Central battery (slave type)

Aksesuar / Accessuary

Bayrak Aparatı / Flag mounting
AAF 150x325x45mm, 380gr.



AAW1

Çelik Tel Askı / Steel wire hanger
1000mm, 80gr.



AAH

Ayarlı Askı Teli tutucusu / Adjustable hanged holder
60x6mm, 30x6mm, 80gr.




AAZ1



Zincir Askı / Chain hanger
1000mm, 70gr.



AKS

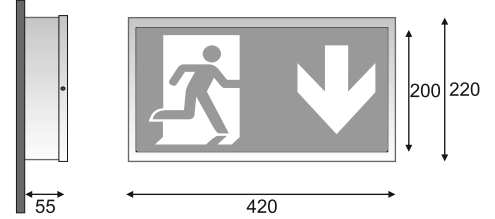

AKD

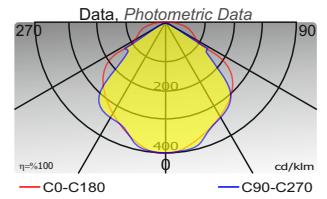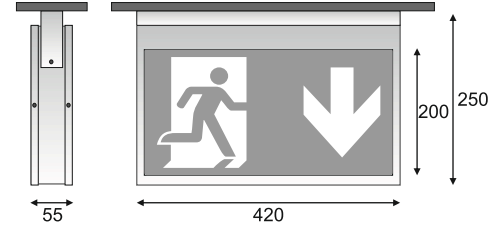

AKS-PXX Etiket, Sticker 408x208mm, 50gr.



Code	Type	Duration	Battery	Flux	Dimension	Weight
AKSL L6 . .	Maintained 6W Led	3h	2x LifePO4 - 3.2V 1500mAh	660lm / 660lm	420x220x55	470gr.
AKSL M4 . .	Maintained 4W Led	3h	2x Ni-Cd - 1.2V 1100mAh	240lm / 180lm	420x220x55	1200gr.
AKS M1 . .	Maintained 8W Flo.	1h	Ni-Cd - 3.6V 1100mAh	300lm / 140lm	420x220x55	1100gr.
AKS M3 . .	Maintained 8W Flo.	3h	Ni-Cd - 3.6V 2500mAh	300lm / 140lm	420x220x55	1200gr.
AKDL M4 . .	Maintained 4W Led	3h	2x Ni-Cd - 1.2V 1100mAh	240lm / 180lm	420x220x55	1200gr.
AKD M1 . .	Maintained 8W Flo.	1h	Ni-Cd - 3.6V 1100mAh	300lm / 140lm	420x220x55	1100gr.
AKD M3 . .	Maintained 8W Flo.	3h	Ni-Cd - 3.6V 2500mAh	300lm / 140lm	420x220x55	1200gr.
AKS CB3 . .	Maintained 3W Led	CB	Central Battery - 216V DC	300lm / 300lm	420x220x55	400gr.
AKS CA3 . .	Maintained 3W Led	CB	Central Battery - 24V DC	300lm / 300lm	420x220x55	450gr.
AKP-PXX . .		Plexi				220gr.