



Surface mounted, double sided

Visibility range

20m

Housing made of UV-featured ABS thermoplastic material
White acrylic plexiglass directional sign
High efficiency LED driver
Easy to install ceiling or wall surface-mounted
Emergency operation time 3 hours
LED high CRI and 60.000hours lifetime
No test, manual test, autotest, DALI2 test, Central battery test
Standard pressed or sticker with pictogram shape
Smart charge circuit for battery charge (LifePO4)

Working voltage : 220 - 230 V AC 50/60Hz $\pm$ 10
Mains supply power : 2W (M2 type) / 5W (M5 type) / 3W (L3 type)
Charge duration : 24 h (first use:48h)
Emg.Light output power : 1W (M2 type) / 3W (M5 type) / 2W (L3 type)
Amp.temp. : -0°C . . 45°C
Case temp. : 75°C
Protection grade : IP40
Electrical classification : II

EN 60598-1, EN 60598-2-22, EN 62034, EN 61347-1, EN 62386,
EN 50172:2024, EN 1838:2024, ISO 7010:2019, EMC-2014/30/EU, LVD-2014/35/EU
CB, CE, EAC, TSE


Optional

Automation system for DALI
Central battery (slave type)

Indicator

Mains on green on: Status normal, battery charging
Mains on green off: Battery ariza
Mains off red on: Mains fault
Mians off red off: Inverter fault

AHS

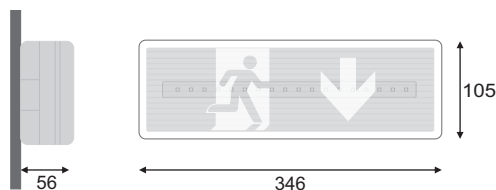

ADS-PXX Sticker 300x100mm, 20gr.

