

OSLO

ALTEZ

betterlight,betterlife



Surface mounted, double sided

Visibility range

30m

Housing made of extrusion aluminium material

Transparent acrylic plexiglass directional sign

High efficiency LED driver

Easy to install ceiling or wall surface-mounted

Recessed mounting is available by accessory

Emergency operation time 3 hours

LED high CRI and 60.000hours lifetime

No test or manual test

Standard pressed or sticker with pictogram shape

Smart charge circuit for battery charge (LifePO4)

Working voltage : 220 - 230 V AC 50/60Hz $\pm$ 10

Mains supply power : 2W (M2 type) / 5W (M5 type) / 3W (L3 type)

Charge duration : 24 h (first use:48h)

Emg.Light output power : 1W (M2 type) / 3W (M5 type) / 2W (L3 type)

Amp.temp. : -0°C . . 45°C

Case temp. : 75°C



Protection grade : IP40

Electrical classification : I

EN 60598-1, EN 60598-2-22, EN 62034, EN 61347-1, EN 62386,

EN 50172:2024, EN 1838:2024, ISO 7010:2019, EMC-2014/30/EU, LVD-2014/35/EU

CB, CE, EAC, TSE

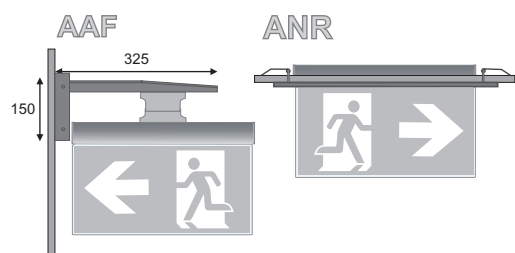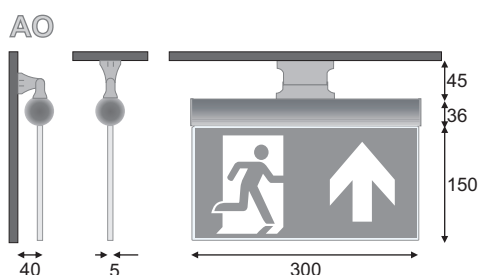

Accessory

Recessed mounting

ANR 377x88x44mm, 290gr.



Flag mounting

AAF 150x325x45mm, 380gr.



Steel wire hanger

AAW1-AS 1000mm, 80gr.

AAW2-AS 2000mm, 160gr.

AAW3-AS 3000mm, 240gr.

AAW4-AS 4000mm, 320gr.



AVSS-PXX Sticker 280x150mm, 10gr.



Code	Type/Power Rate	Battery	Mains/Emg. Flux
AOW L3 . .	Maintained 2W	LiFePO4 - 3.2V 1800mAh	200lm / 180lm
AOW M2 . .	Maintained 1W	Ni-Cd - 1.2V 1100mAh	120lm / 90lm
AOW M5 . .	Maintained 3W	Ni-Cd - 2.4V 1100mAh	160lm / 110lm

