



Surface mounted, double sided


Visibility range

30m

Housing made of injection plastics material
Transparent acrylic plexiglass directional sign
High efficiency LED driver
Easy to install ceiling or wall surface-mounted
Recessed mounting is available by accessory
Emergency operation time 3 hours
LED high CRI and 60.000hours lifetime
No test, manual test, autotest, DALI2 test, Central battery test
Standard pressed or sticker with pictogram shape
Smart charge circuit for battery charge (LiFePO4)

Working voltage : 220 - 230 V AC 50/60Hz $\pm$ 10
Mains supply power : 2W (M2 type) / 5W (M5 type) / 3W (L3 type)
Charge duration : 24 h (first use:48h)
Emg.Light output power : 1W (M2 type) / 3W (M5 type) / 2W (L3 type)
Amp.temp. : -0°C . . 45°C
Case temp. : 75°C
Protection grade : IP65
Electrical classification : II

EN 60598-1, EN 60598-2-22, EN 62034, EN 61347-1, EN 62386,
EN 50172:2024, EN 1838:2024, ISO 7010:2019, EMC-2014/30/EU, LVD-2014/35/EU
CB, CE, EAC, TSE

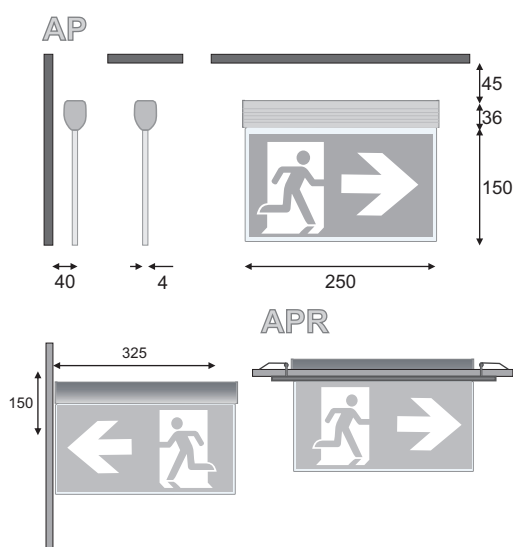

Accessory

Recessed mounting

APR 320x80x44mm, 280gr.



Flag mounting

AAF 150x325x45mm, 380gr.



Steel wire hanger

AAW1-AS 1000mm, 80gr.
AAW2-AS 2000mm, 160gr.
AAW3-AS 3000mm, 240gr.
AAW4-AS 4000mm, 320gr.



AVSS-PXX Sticker 280x150mm, 10gr.



Code	Type/Power Rate	Battery	Mains/Emg. Flux
AP L3 . .	Maintained 2W	LiFePO4 - 3.2V 1800mAh	200lm / 180lm
AP M2 . .	Maintained 1W	Ni-Cd - 1.2V 1100mAh	120lm / 90lm
AP M5 . .	Maintained 3W	Ni-Cd - 2.4V 1100mAh	160lm / 110lm

