



Surface mounted, double sided

Visibility range

30m

Housing made of UV-featured ABS thermoplastic material
White acrylic plexiglass directional sign
High efficiency LED driver
Easy to install ceiling or wall surface-mounted
Recessed mounting is available by accessory
Emergency operation time 3 hours
LED high CRI and 60.000hours lifetime
No test, manual test, autotest, DALI2 test, Central battery test
Standard pressed or sticker with pictogram shape
Smart charge circuit for battery charge (LiFePO4)

Working voltage : 220 - 230 V AC 50/60Hz $\pm$ 10
Mains supply power : 2W (M2 type) / 5W (M5 type) / 3W (L3 type)
Charge duration : 24 h (first use:48h)
Emg.Light output power : 1W (M2 type) / 3W (M5 type) / 2W (L3 type)
Amp.temp. : -0°C . . 45°C
Case temp. : 75°C
Protection grade : IP40
Electrical classification : II

EN 60598-1, EN 60598-2-22, EN 62034, EN 61347-1, EN 62386,
EN 50172:2024, EN 1838:2024, ISO 7010:2019, EMC-2014/30/EU, LVD-2014/35/EU
CB, CE, EAC, TSE


Optional

Automation system for DALI
Central battery (slave type)


Indicator

Mains on green on: Status normal, battery charging
Mains on green off: Battery ariza
Mains off red on: Mains fault
Mians off red off: Inverter fault

AS

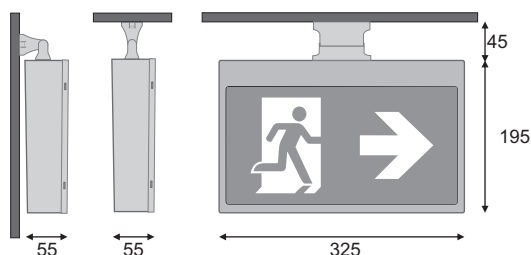

AAF

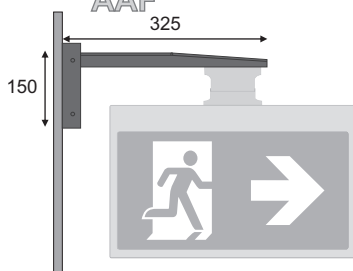

Accessuary

Flag mounting

AAF 150x325x45mm, 380gr.



Steel wire hanger

AAW1-AS 1000mm, 80gr.
AAW2-AS 2000mm, 160gr.
AAW3-AS 3000mm, 240gr.
AAW4-AS 4000mm, 320gr.



AVSS-PXX Sticker 280x150mm, 10gr.



Code	Type/Power Rate	Battery	Mains/Emg. Flux
AS L3	Maintained 2W	LiFePO4 - 3.2V 1800mAh	200lm / 180lm
AS M2	Maintained 1W	Ni-Cd - 1.2V 1100mAh	120lm / 90lm
AS M5	Maintained 3W	Ni-Cd - 2.4V 1100mAh	160lm / 110lm
AS D2	Maintained 2W	LiFePO4 - 3.2V 1800mAh	220lm / 140lm
AS D4	Maintained 4W	LiFePO4 - 3.2V 3600mAh	420lm / 420lm

