

## **Product Datasheet**

110 M M ♣ CE [A[ 🙈 🖯 🗖

- Features :
- Constant current mode power supply
- Universal AC input / Full range
- Withstand 265VAC Surge input for 60 seconds
- Protections:Short circuit / Over voltage
- Fully isolated plastic case
- Small and compact size
- Cooling by free air convectionIP20 design 100% full load burn-in test
- Suitable for LED related fixture or appliance(such as LED Decoration or Advertisement devices)

### **ADN-28700** FLECTRICAL SPECIFICATIONS

## **28W Single Output Constant Current**

	ADN-28700
RATED CURRENT	700mA
	20-40V
	28W
-	350mVp-p
` '	±5.0%
CURRENT ACCURACY LINE REGULATION LOAD REGULATION SETUP, RISE TIME	±8.0%
	±1.0%
	±3.0%
	1500ms, 40ms full load at 230VAC
	20ms full load at 230VAC
	90 ~ 264VAC
	47 ~ 63Hz
-	
	88%
	< 0.5W at 230VAC, typical
NOMINAL CURRENT	1,8W full load at 230VAC, input power 31,8W max.
	0.099A full load, at 230VAC 50Hz
	0.97 full load, at 230VAC 50Hz
	<20% full load, at 230VAC 50Hz
	<45A (twidth=490 s measured at 50% lpeak) at 230VAC 50Hz
	17 units (circuit breaker of type B) / 28 units (circuit breaker of type C) at 230VAC 50Hz
	Class II, Suitable for class I luminaires
LEAKAGE CURRENT	0.25mA at 230VAC output floating
OVERLOAD OVER VOLTAGE	Above 5% rated output power
	Protection type: Hiccup mode, recovers automatically after fault condition is removed
	52V
	Protection type : Shut off o/p voltage, clamping by zener diode
OVER TEMPERATURE	Hiccup mode, recovers automatically after temperature goes down
WORKING TEMP.	-30°C 70°C (Refer to "Derating Curve")
WORKING HUMIDITY	20 ~ 75% RH non-condensing
	-40°C 80°C, 10 ~ 95% RH
	±0.03%/°C (0 ~ 50°C)
RATING	Indoor
IP RATING  MAINS SWITCHING CYCLES  EXPECTED LIFETIME  VIBRATION	IP20
	> 100.000
	35.000hrs tc Max =75°C, 10% failure rate, 50.000hrs tc Max =65°C, 10% failure rate
	IEC60068-2-6 TEST Fc (Sinusoidal), IEC600068-2-27 Test Ea and guidance: Shock,
	IECG00068-2-29 Basic Test Part2: Bump
SAFETY STANDARDS	10 ~ 500Hz, 2G 10min./cycle, period for 60min. Each along X, Y, Z axes  EN61347-1, Lamp controlgear - Part1:General and safety requirements
	EN61347-2-13, Lamp controlgear - Part2-13: Particular requirements for dc or ac supplied electronic control gear for
SAFETY STANDARDS	Led modules
WITHSTAND VOLTAGE	I/P-O/P:500VAC
PERFORMANCE REQUIREMENTS	EN62384, DC or AC supplied electronic control gear for LED modules
ISOLATION RESISTANCE	I/P - O/P > 7M Ohms / 500VDC / 25°C / 70% RH
EMC EMISSION	EN55015, EN55032 (CISPR32) Class B, EN61000-3-2 Class A, EN61000-3-3
EMC IMMUNITY	EN61547, EN61000-4-2,3,4,5,6,8,11, EN55024
DIMENSION	Lenght 150mm, With 28mm, Height 24mm
MOUNTING HOLE SPACING	Lenght 143mm, With 13mm
PACKAGE	
WEIGHT&PACKING	/Ugr. /UDCS/13.UKgS/U./1U.UFI
WEIGHT&PACKING CASING MATERIAL	70gr. 70pcs/13.0Kgs/0.71CUFT  Plastic
CASING MATERIAL	Plastic
CASING MATERIAL  1. All parameters NOT specially mentioned	0 1 7 07
	NOMINAL DC VOLTAGE RANGE RATED POWER RIPPLE & NOISE (max.) Note.2 VOLTAGE TOLERANCE Note.3 CURRENT ACCURACY LINE REGULATION LOAD REGULATION SETUP, RISE TIME HOLD UP TIME (Typ.) VOLTAGE RANGE FREQUENCY RANGE EFFICIENCY NO-LOAD POWER POWER LOSS NOMINAL CURRENT POWER FACTOR TOTAL HARMONIC DISTORTION (THD) INRUSH CURRENT MAX. NO.OF PSUS ON 16A CIRCUIT BREAKER PROTECTION CLASS LEAKAGE CURRENT OVERLOAD  OVER VOLTAGE  OVER TEMPERATURE WORKING TEMP. WORKING HUMIDITY STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT RATING IP RATING MAINS SWITCHING CYCLES EXPECTED LIFETIME VIBRATION  SAFETY STANDARDS WITHSTAND VOLTAGE PERFORMANCE REQUIREMENTS ISOLATION RESISTANCE EMC EMISSION EMC IMMUNITY

3. Tolerance: includes set up tolerance, line regulation and load regulation.

4. The power supply is considered as a component that will be operated in combination with final equipment, Since EMC performance will be affected.


by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.





# **ADN-28700**

## **28W Single Output Constant Current**


### Diagrams







#### **Mecanical Specification**

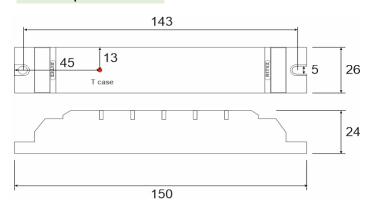

## **Wiring Diagram**

